

# TROPIC Technical characteristics

## CONSTRUCTION

- Constructed from pressed 18/10 stainless steel.
- Welded under argon.
- Walls have rounded internal corners - all sliding rails are constructed from stainless steel thread.

## DOORS

- Glass doors: grey/blue smoked glass, treated with a film to reflect heat back into the unit. Glass is framed with stainless steel.
- Stainless steel: door and doorframe/internal door in 18/10 stainless steel, insulated by ceramic fibre and rockwool.

Both door versions are equipped with a seal to prevent heat loss; doors are hinged on the left.

## LOCKING SYSTEM

- The locking mechanism for the door handle is in a striking plate.
- Parts are in moulded aluminium covered in epoxy resin.

## GRAB HANDLE

- Made from 2 pieces of moulded aluminium covered in baked epoxy resin and one round stainless steel tube.

## WHEELS

- 4 pivoting wheels, of which 2 are braked, polyurethane treads, max. load per wheel 150 kg.
- Wheels fixed by discs.

## HEATING SYSTEM

- Protected circular heating element, in stainless steel, power rating 1500 W, surrounding the ventilator.

- Cold and warm air are sucked in and distributed via carefully placed nozzles.
- Thermostat control, control panel, adjustable temperature, thermometer.
- Element and ventilator stop immediately when the door is opened.
- Fuse-protected, voltage: 240-50 Hz AC.

## CORNER SCUFF PROTECTORS

- In non-marking rubber.

## OPTIONS

- Manual humidity control (1 tub GN 1/1-65 with anti-wave facility) - **Code 32910**
- Automatic humidity control (only on fixed cupboards) - **Code 32911**

MODELS	Tray racks spacing	Glass door	Steel door	Power (Watts)	Dimensions (W x D x H) (in mm)	Code
Mobile cupboards: capacity 17 levels 2/1	78	1	-	2 000	890 x 790 x 1 742 mm	<b>32 726</b>
		-	1	2 000	890 x 790 x 1 742 mm	<b>32 727</b>
Mobile cupboards: capacity 11 levels 2/1	115	1	-	2 000	890 x 790 x 1 742 mm	<b>32 724</b>
		-	1	2 000	890 x 790 x 1 742 mm	<b>32 725</b>
Mobile cupboards: capacity 12 levels 2/1	78	1	-	2 000	890 x 790 x 1 352 mm	<b>32 786</b>
		-	1	2 000	890 x 790 x 1 352 mm	<b>32 787</b>
Mobile cupboards: capacity 7 levels 2/1	115	1	-	2 000	890 x 790 x 1 352 mm	<b>32 784</b>
		-	1	2 000	890 x 790 x 1 352 mm	<b>32 785</b>
Mobile cupboards: capacity 12 levels 1/1	78	1	-	2 000	685 x 710 x 1 352 mm	<b>32 711</b>
		-	1	2 000	685 x 710 x 1 352 mm	<b>32 712</b>
Mobile cupboards: capacity 7 levels 1/1	115	1	-	2 000	685 x 710 x 1 352 mm	<b>32 709</b>
		-	1	2 000	685 x 710 x 1 352 mm	<b>32 710</b>
Fixed cupboards: capacity 17 levels 2/1	78	1	-	2 000	840 x 740 x 1 737 mm	<b>32 736</b>
		-	1	2 000	840 x 740 x 1 737 mm	<b>32 737</b>
Fixed cupboards: capacity 11 levels 2/1	115	1	-	2 000	840 x 740 x 1 737 mm	<b>32 734</b>
		-	1	2 000	840 x 740 x 1 737 mm	<b>32 735</b>
"Pass" cupboards: capacity 17 levels 2/1	78	2	-	2 000	840 x 780 x 1 587 mm	<b>32 766</b>
		-	2	2 000	840 x 780 x 1 587 mm	<b>32 767</b>
		1	1	2 000	840 x 780 x 1 587 mm	<b>32 765</b>
"Pass" cupboards: capacity 11 levels 2/1	115	2	-	2 000	840 x 780 x 1 587 mm	<b>32 757</b>
		-	2	2 000	840 x 780 x 1 587 mm	<b>32 758</b>
		1	1	2 000	840 x 780 x 1 587 mm	<b>32 756</b>
"Pass" cupboards: capacity 12 levels 1/1	78	2	-	2 000	635 x 700 x 1 197 mm	<b>32 751</b>
		-	2	2 000	635 x 700 x 1 197 mm	<b>32 752</b>
		1	1	2 000	635 x 700 x 1 197 mm	<b>32 750</b>
"Pass" cupboards: capacity 7 levels 1/1	115	2	-	2 000	635 x 700 x 1 197 mm	<b>32 747</b>
		-	2	2 000	635 x 700 x 1 197 mm	<b>32 748</b>
		1	1	2 000	635 x 700 x 1 197 mm	<b>32 746</b>
Trolley cupboards: capacity 2/1	-	1	-	4 000	1 000 x 950 x 1 955 mm	<b>32 778</b>
		-	1	4 000	1 000 x 950 x 1 955 mm	<b>32 779</b>
		2	-	4 000	1 000 x 950 x 1 955 mm	<b>32 774</b>
		-	2	4 000	1 000 x 950 x 1 955 mm	<b>32 775</b>
		1	1	4 000	1 000 x 950 x 1 955 mm	<b>32 773</b>



vauconsant





**HEATING CUPBOARDS**

**TROPIC**



vauconsant

# TROPIC

## exclusive advantages

TROPIC heating cupboards by VAUCONSANT allow you to link cooking and distribution whilst also guaranteeing meals at the right temperature and with no loss of taste for the consumer.

TROPIC cupboards maintain a minimum food temperature of 65° C. They bring unique advantages to the market due to their advanced construction and quality of manufacture.

### **Doors:** **security, practicality,** **competitiveness**

**Available at the same price:**

*totally insulated stainless steel door or glass door treated with a film to reflect heat back into the cupboard.*

*Advantages:  
no risk of burning and immediate visual check on the contents.*

### **Tray racks:** **choice of spacing,** **ease of maintenance**

*Spacing of 78 or 115 mm to suit the depth of your food trays. The racks can be removed with ease for easier cleaning and improved hygiene.*

### **Joins with rounded corners for perfect cleaning**

*Inside the cupboard (lower part) and around the perimeter of the door.*

### **Opening:** **comfort of service**

*Element and ventilation stop automatically when the door is opened.*

### **Handle:** **security fixing**

*The handle and locking system prevents accidental door opening under any conditions.*

### **Side heating:** **efficiency and economy**

*Excellent heat distribution at lowest cost (just 1.8 kW to reach 90° C in 35 minutes).*

### **Special high load wheels:** **guaranteed ease of movement**

*Wheels and handle are designed for movement with minimum effort.*

▲ **Model shown**  
*Mobile cupboard with glass door - Code: 32 726 - GN 2/1*

### **Guaranteed hygrometry:** **food will not dry out**

If the containers are not covered, two humidifying systems (automatic or manual) are available as options.





# TROPIC a complete range

The new TROPIC range by VAUCONSANT comprises 7 base models: 4 sizes of unit with numerous variations and options: mobile cupboards, fixed ones, double-door or trolley

models, opening on 1 or 2 sides. TROPIC thus covers all temperature-maintenance needs whatever the configuration and distance between kitchen and serving point.



▲ **Mobile cupboard, steel door**  
Code: 32 712 - 12 GN 1/1



▲ **Pass cupboard, 2 glass doors**  
seen from kitchen side - Code: 32 766 - 17 GN 2/1



▲ **Trolley cupboard, glass door**  
Code: 32 778 - Trolley GN 2/1



▲ **Pass cupboard, 2 doors, steel door on restaurant side, glass door kitchen side**  
Code: 32 750 - 12 GN 1/1







▲ **Fixed cupboard, glass door**  
Code: 32 736 - 17 GN 2/1



▲ **Cupboard for oven trolley or loading wagon**

## Uses for all configurations

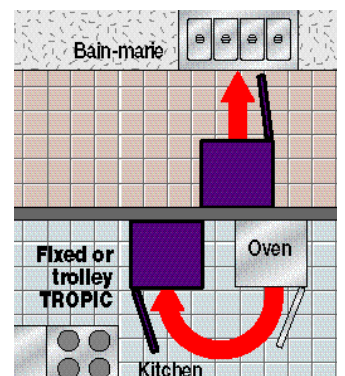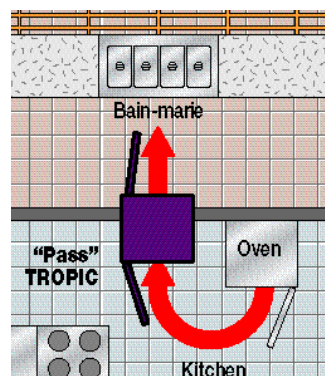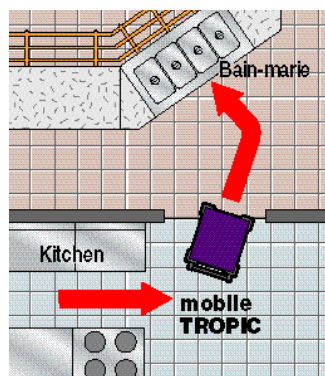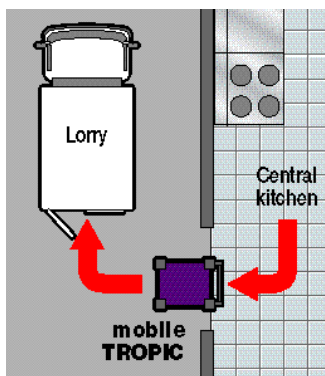

# TROPIC Technical characteristics

## CONSTRUCTION

- Constructed from pressed 18/10 stainless steel.
- Welded under argon.
- Walls have rounded internal corners - all sliding rails are constructed from stainless steel thread.

## DOORS

- Glass doors: grey/blue smoked glass, treated with a film to reflect heat back into the unit. Glass is framed with stainless steel.
- Stainless steel: door and doorframe/internal door in 18/10 stainless steel, insulated by ceramic fibre and rockwool.

Both door versions are equipped with a seal to prevent heat loss; doors are hinged on the left.

## LOCKING SYSTEM

- The locking mechanism for the door handle is in a striking plate.
- Parts are in moulded aluminium covered in epoxy resin.

## GRAB HANDLE

- Made from 2 pieces of moulded aluminium covered in baked epoxy resin and one round stainless steel tube.

## WHEELS

- 4 pivoting wheels, of which 2 are braked, polyurethane treads, max. load per wheel 150 kg.
- Wheels fixed by discs.

## HEATING SYSTEM

- Protected circular heating element, in stainless steel, power rating 1500 W, surrounding the ventilator.

- Cold and warm air are sucked in and distributed via carefully placed nozzles.
- Thermostat control, control panel, adjustable temperature, thermometer.
- Element and ventilator stop immediately when the door is opened.
- Fuse-protected, voltage: 240-50 Hz AC.

## CORNER SCUFF PROTECTORS

- In non-marking rubber.

## OPTIONS

- Manual humidity control (1 tub GN 1/1-65 with anti-wave facility) - **Code 32910**
- Automatic humidity control (only on fixed cupboards) - **Code 32911**

MODELS	Tray racks spacing	Glass door	Steel door	Power (Watts)	Dimensions (W x D x H) (in mm)	Code
Mobile cupboards: capacity 17 levels 2/1	78	1	-	2 000	890 x 790 x 1 742 mm	32 726
		-	1	2 000	890 x 790 x 1 742 mm	32 727
Mobile cupboards: capacity 11 levels 2/1	115	1	-	2 000	890 x 790 x 1 742 mm	32 724
		-	1	2 000	890 x 790 x 1 742 mm	32 725
Mobile cupboards: capacity 12 levels 2/1	78	1	-	2 000	890 x 790 x 1 352 mm	32 786
		-	1	2 000	890 x 790 x 1 352 mm	32 787
Mobile cupboards: capacity 7 levels 2/1	115	1	-	2 000	890 x 790 x 1 352 mm	32 784
		-	1	2 000	890 x 790 x 1 352 mm	32 785
Mobile cupboards: capacity 12 levels 1/1	78	1	-	2 000	685 x 710 x 1 352 mm	32 711
		-	1	2 000	685 x 710 x 1 352 mm	32 712
Mobile cupboards: capacity 7 levels 1/1	115	1	-	2 000	685 x 710 x 1 352 mm	32 709
		-	1	2 000	685 x 710 x 1 352 mm	32 710
Fixed cupboards: capacity 17 levels 2/1	78	1	-	2 000	840 x 740 x 1 737 mm	32 736
		-	1	2 000	840 x 740 x 1 737 mm	32 737
Fixed cupboards: capacity 11 levels 2/1	115	1	-	2 000	840 x 740 x 1 737 mm	32 734
		-	1	2 000	840 x 740 x 1 737 mm	32 735
"Pass" cupboards: capacity 17 levels 2/1	78	2	-	2 000	840 x 780 x 1 587 mm	32 766
		-	2	2 000	840 x 780 x 1 587 mm	32 767
		1	1	2 000	840 x 780 x 1 587 mm	32 765
"Pass" cupboards: capacity 11 levels 2/1	115	2	-	2 000	840 x 780 x 1 587 mm	32 757
		-	2	2 000	840 x 780 x 1 587 mm	32 758
		1	1	2 000	840 x 780 x 1 587 mm	32 756
"Pass" cupboards: capacity 12 levels 1/1	78	2	-	2 000	635 x 700 x 1 197 mm	32 751
		-	2	2 000	635 x 700 x 1 197 mm	32 752
		1	1	2 000	635 x 700 x 1 197 mm	32 750
"Pass" cupboards: capacity 7 levels 1/1	115	2	-	2 000	635 x 700 x 1 197 mm	32 747
		-	2	2 000	635 x 700 x 1 197 mm	32 748
		1	1	2 000	635 x 700 x 1 197 mm	32 746
Trolley cupboards: capacity 2/1	-	1	-	4 000	1 000 x 950 x 1 955 mm	32 778
		-	1	4 000	1 000 x 950 x 1 955 mm	32 779
		2	-	4 000	1 000 x 950 x 1 955 mm	32 774
		-	2	4 000	1 000 x 950 x 1 955 mm	32 775
		1	1	4 000	1 000 x 950 x 1 955 mm	32 773





**HEATING CUPBOARDS**

**TROPIC**



vauconsant